



Battery Handling and Precautions

Soldering

- Do not solder directly onto batteries. Always solder onto solder tag for connection.
- GP NiMH rechargeable button cells with tags can be flow-soldered in a charged state within 10 seconds.

Charging and Discharging

- Always charge batteries before first time application.
- Parallel charging or connection is not recommended. Parallel charging will produce irregular charging currents. Please consult GP Batteries for more details.
- Never short-circuit or reverse polarity in application.
- Do not use different types of batteries in the same battery assembly.
- If the battery has been deep-discharged, a prolonged charging time is required to bring the battery back to full capacity.

Storage

- Always store batteries in a cool, dry place.
- After long storage, e.g. over a year, it is desirable to cycle (charge/discharge) the battery 3 times to restore full capacity.
- Do not mix batteries with metal objects during storage or transportation to avoid accidental short-circuit.
- Do not store large quantities of batteries in a densely packed condition when they are in a charged or partially charged state.

Battery Handling

- Do not incinerate or dismantle batteries. Cell components are corrosive and may be harmful to skin and eyes.
- Do not pull on battery lead wires or connector. Excessive force on the leads or connectors can damage the welding joints or other connections.

Easy Battery Removal

- Some countries have legislation requiring easy removal of batteries from the devices. When designing a product, consideration should be given to the use of a socket connector and an easy-to-open battery compartment.

Distributed by:

GP Batteries

**WORLDWIDE HEADQUARTERS
HONG KONG**

GPI INTERNATIONAL LIMITED

Gold Peak Building, 8/F, 30 Kwai Wing Road,
Kwai Chung, N.T., Hong Kong
Tel: (852) 2484 3333 Fax: (852) 2480 5912
E-mail address: gpii@goldpeak.com
Website: <http://www.gpbatteries.com.hk>

SALES & MARKETING BRANCH OFFICES

ASEAN
GP BATTERY MARKETING (SINGAPORE) PTE. LIMITED
97 Pioneer Road, Singapore 639579
Tel: (65) 6559 9760 Fax: (65) 6559 9761

MALAYSIA
GP BATTERY MARKETING (MALAYSIA) SDN. BHD.
Lot 8, Jalan Pemberita U1/49,
Temasya Industrial Park,
40150 Shah Alam, Selangor Darul Ehsan, Malaysia
Tel: (60) 3 5569 3499 Fax: (60) 3 5569 3498

THAILAND
GP BATTERY MARKETING (THAILAND) CO., LTD.
102 Soi Sukhumvit 26, Sukhumvit Road,
Klongton, Klongtoey,
Bangkok 10110 Thailand
Tel: (66) 2 661 3688 Fax: (66) 2 661 3602

TAIWAN
GOLD PEAK INDUSTRIES (TAIWAN) LIMITED - TAIPEI OFFICE
8/F, No.205 Sec.1, Fu Xing South Road,
Taipei 10666, Taiwan, R.O.C.
Tel: (886) 2 2772 9998 Fax: (886) 2 2731 4868/2741 0192

CHINA
HUIZHOU CHAO BA BATTERY TECHNOLOGY CO., LTD
2/F, South of Hongye Industrial Building,
Tianluo Mountain, 14th Industrial District,
Huizhou City, Guangdong, China
(Postal Code: 516003)
Tel: (86) 752 282 8428 Fax: (86) 752 280 2872

HONG KONG
GP BATTERY MARKETING (H.K.) LIMITED
Gold Peak Building, 8/F, 30 Kwai Wing Road,
Kwai Chung, N.T., Hong Kong
Tel: (852) 2420 0281 Fax: (852) 2494 9349

KOREA
GP BATTERY MARKETING (KOREA) LIMITED
Kunsul Hoekwan Building, 9/F, 71-2 Non Hyun-Dong,
Kang Nam-Gu, Seoul, South Korea
Tel: (82) 2 549 7188/9, 2 516 3936/7
Fax: (82) 2 514 0623, 2 516 0621

U.S.A.
GOLD PEAK INDUSTRIES (NORTH AMERICA) INC.
11235 West Bernardo Court, San Diego,
CA 92127-1638, U.S.A.
Tel: (1) 858 674 6099 Fax: (1) 858 674 6496/674 5883

CANADA
GP BATTERY MARKETING INC.
Unit 7, 7780 Woodbine Avenue, Markham,
Ontario, Canada L3R 2N7
Tel: (1) 905 474 9507 Fax: (1) 905 474 9452

LATIN AMERICA
GP BATTERY MARKETING (LATIN AMERICA) INC.
8370 NW, 66th Street, Miami, Florida 33166, U.S.A.
Tel: (1) 305 471 7717 Fax: (1) 305 471 7718

EUROPE
GP BATTERIES EUROPE B.V.
Kortjizer 4, 5721 VE Asten,
The Netherlands
Tel: (31) 493 681030 Fax: (31) 493 681039

GERMANY
GP BATTERY MARKETING (GERMANY) GMBH
Schiesstrasse 68,
D-40549 Dusseldorf, Germany
Tel: (49) 211 522 954 0 Fax: (49) 211 522 954 54

POLAND
GP BATTERY (POLAND) SP. Z.O.O.
ul. Slowicza 19, PL-02170 Warsaw, Poland
Tel: (48) 22 868 0490 Fax: (48) 22 846 7535

U.K.
GP BATTERIES (U.K.) LIMITED
Summerfield Avenue, Chelston Business Park,
Wellington, Somerset, TA21 9JF, United Kingdom
Tel: (44) 1 823 660 044 Fax: (44) 1 823 665 595

ITALY
GP BATTERY MARKETING ITALY S.R.L.
Via. Alessandro Volta 3,
20094 Assago (MI), Italy
Tel: (39) 02 488 2512 Fax: (39) 02 488 2865

SCANDINAVIA
GPBM NORDIC AB
Grimboasen 5, SE-417 49, Goteborg, Sweden
Tel: (46) 31 558 600 Fax: (46) 31 556 813

www.infrarossi.it

GP Batteries

NiMH Rechargeable Batteries





Rechargeable Batteries

Achieving World Class Standard

Committed to continued efforts in R&D and product innovation, GP Batteries is proud to present a whole range of high capacity NiMH batteries including cylindrical, prismatic and button series. This has been achieved through revolutionary designs in construction and new chemical formulation that increase the utilisation efficiency of the electrodes. The performance has also been perfected by the cell's improved mechanical construction and the use of unique thinner and stronger separators.



Major Features

- High capacity**
 GP NiMH batteries have high energy density and deliver up to double the capacity of NiCd batteries of similar size. They are most suitable for sophisticated high drain applications e.g. video cameras, cellular phones, notebook computers, etc.
- Superior high rate discharge characteristics**
 Up to 3C high rate discharge is possible.
- Broad operating temperature range**
 Down to -20°C and up to 60°C.
- Quick charging capability**
 Rapid charge in about one hour with GP specified charging condition.
- Long service life**
 Under different usage conditions, GP NiMH batteries can deliver 300 -1000 charge/discharge cycles.
- Excellent overcharge endurance**
 GP NiMH batteries can be continuously charged at 0.1C rate for one year without leakage or deformation.
- Built-in safety protection mechanism against misuse**
 A safety vent is built in to relieve internal pressure in case of misuse. Polarity reversal and overdischarge protection mechanisms are also incorporated in the cell.
- No memory effect**
 Discharge is not required before charging.
- Environmentally friendlier**
 No cadmium, lead or mercury are added. Most suitable for markets with high environmental concerns.
- Comprehensive range**
 GP NiMH batteries comprise of cylindrical, prismatic and button sizes catering for a wide range of applications.
- High reliability**
 GP NiMH batteries are produced with the best available material and advanced technology, allowing them to perform with outstanding reliability.
- ISO accreditation**
 GP Batteries is accredited by the ISO 9001, 14001, QS 9000 and OHSAS 18001 for the outstanding product safety, reliability and environmental friendliness.




Major Applications

- Communications**
 Cellular phones, cordless phones, transceivers.
- Information devices**
 Notebook computers, personal digital assistants (PDAs), portable facsimile machines, MBU, bridging.
- Audio and video devices**
 Digital video cameras, LCD TVs, portable DVD, VCD, MD and CD players.
- Emergency lighting**
- Remote controls & security systems**
 Car alarms, smoke detectors, security alarms.
- Other applications**
 Remote control toys, shavers, massagers, electric tooth brushes, handheld vacuum cleaners, power tools, handheld terminals, electric bicycles, etc.




Cell Construction


Cylindrical

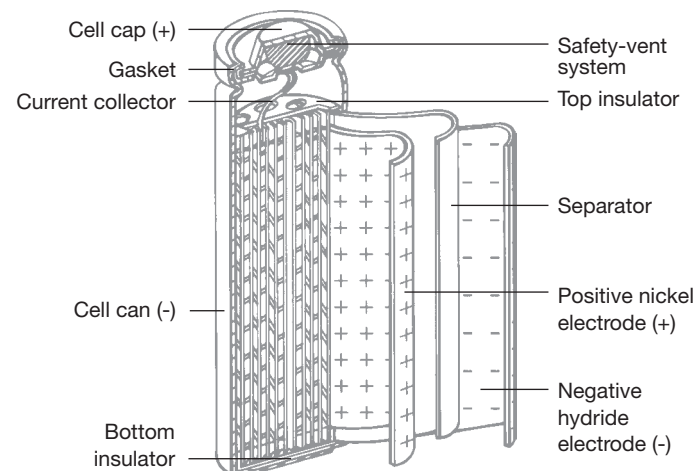

Prismatic

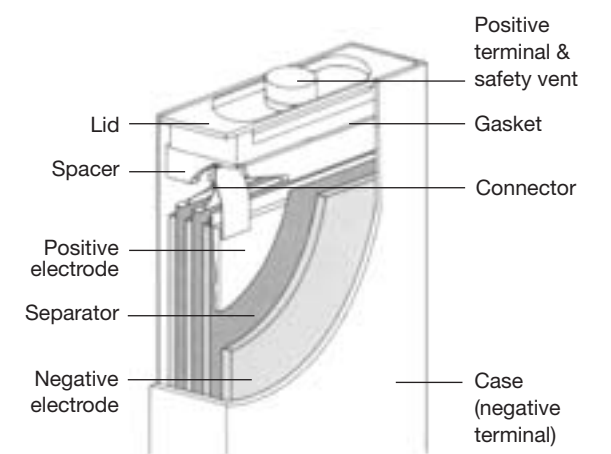

Button

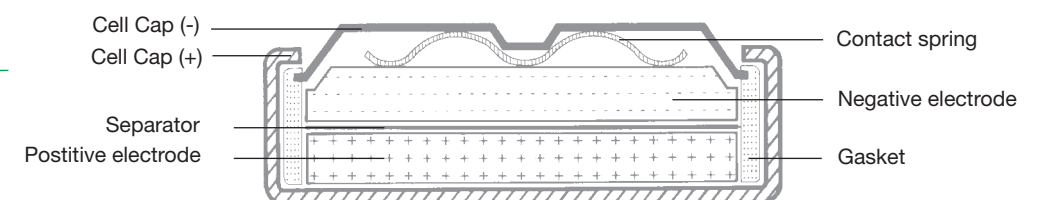

Specifications

Cylindrical Type

Cell Size	Model No.	Nominal Voltage (V)	Capacity (0.2C discharge)*(mAh)		Nominal Dimension (mm)		Weight (g)	Standard Charge		1 Hr Charge Current (mA)#	
			Minimum	Typical	Diameter	Height		Current (mA)	Time (hour)		
High Capacity Series											
AAA	2/3 AAA	GP40AAAM	1.2	400	420	10.4	29.3	8.0	40	16	400
	4/5 AAA	GP50AAASH	1.2	500	515	10.5	36.2	9.3	50	16	500
	AAA	GP65AAAH**	1.2	650	680	10.5	43.7	13	65	16	650
	AAA	GP70AAAH**	1.2	700	730	10.5	43.7	13	70	16	700
	AAA	GP75AAAH**	1.2	750	780	10.5	43.7	13	75	16	750
	AAA	GP80AAAH	1.2	780	800	10.5	43.7	13	80	16	800
	AAAL	GP91AAALH	1.2	910	930	10.5	50	15.1	91	16	910
	7/5 AAAL	GP100AAALH	1.2	1000	1050	10.5	66.5	19.5	100	16	1000
	9/5 AAAL	GP120AAALH	1.2	1200	1250	10.5	80	23	120	16	1200
AA	2/3 AA	GP75AAH	1.2	750	770	14.5	28.7	15	75	16	750
	AA	GP150AAAM**	1.2	1500	1530	14.4	48.2	26	150	16	1500
	AA	GP160AAH**	1.2	1600	1640	14.5	49.2	26	160	16	1600
	AA	GP170AAH	1.2	1700	1750	14.5	49.2	27	170	16	1700
	AA	GP180AAH**	1.2	1800	1850	14.5	49.2	27	180	16	1800
	7/5 AA	GP190AAH	1.2	1900	1960	14.5	65	35	190	16	1900
	AA	GP200AAH	1.2	2000	2050	14.5	49.5	28.8	200	16	2000
AF	AA	GP210AAH	1.2	2100	2150	14.5	49.5	29.5	210	16	2100
	AA	GP220AAH	1.2	2200	2250	14.5	49.5	30.5	220	16	2200
	AA	GP240AAH	1.2	2400	2450	14.5	49.5	32	240	16	2400
	4/5 AF	GP211AFH**	1.2	2100	2160	17	43	32	210	16	2100
	AF	GP250AFH**	1.2	2500	2550	17	50.2	39	250	16	2500
	AF	GP270AFH	1.2	2600	2700	17	50.2	39.5	270	16	2700
	7/5 AF	GP370AFM	1.2	3700	3750	17.2	67	52	370	16	3700
	7/5 AF	GP380AFH**	1.2	3700	3800	17.5	67	53.5	380	16	3800
	N	GP50NH	1.2	500	520	11.65	29.4	9.8	50	16	500
18650	18650	GP410LAH**	1.2	4100	4220	18.3	65.5	58	410	16	4100
18670	18670	GP450LAH**	1.2	4300	4500	18.3	67	60	450	16	4500
Sub-C	4/5 Sub-C	GP200SCH	1.2	2000	2100	23	34	48	200	16	2000
	Sub-C	GP330SCH	1.2	3300	3430	23	43	62	330	16	3300
C	C	GP350CH	1.2	3500	3850	25.8	50	78.5	350	16	3500
	C	GP400CH**	1.2	4000	4200	25.8	50	82	400	16	4000
D	C	GP900CH	1.2	9000	9450	25.8	86	164	900	16	9000
	D	GP700DH**	1.2	7000	7350	33	60	155	700	16	7000
	D	GP900DH**	1.2	9000	9225	33	60	170	900	16	Not Applicable
F	D	GP1000DH	1.2	10000	10250	33	60	175	1000	16	10000
	F	GP1300FH	1.2	13000	13650	33	90	247	1300	16	Not Applicable

Typical Ambient Temperature : Standard Charge : 0°C to 40/45°C, Fast Charge : 10°C to 40/45°C, Discharge : -20°C to 50°C, Storage : -20°C to 35°C

High Drain Series

AA	AA	GP130AAHE	1.2	1300	1350	14.5	49.2	25.5	130	16	1300
Sub-C	Sub-C	GP300SCH**	1.2	2800	3000	23	43	61	300	16	3000

Typical Ambient Temperature : Standard Charge : 0°C to 40/45°C, Fast Charge : 10°C to 40/45°C, Discharge : -20°C to 50°C, Storage : -20°C to 35°C

High Temperature Series

AAA	AAA	GP60AAAHT	1.2	600	630	10.5	43.7	13	60	16	Not Applicable
AA	AA	GP110AAHT	1.2	1100	1155	14.4	48.2	21.5	110	16	Not Applicable
	AA	GP125AAMT**	1.2	1250	1280	14.4	48.2	26	125	16	Not Applicable
AF	4/5 AF	GP160AFHT	1.2	1600	1680	17	43	33	160	16	Not Applicable
	AF	GP210AFHT	1.2	2100	2205	17	50	38	210	16	Not Applicable
18700	18700	GP400LAHT	1.2	4000	4200	18.3	70	70	400	16	Not Applicable
Sub-C	Sub-C	GP220SCHT**	1.2	2200	2420	23	43	53	220	16	Not Applicable
	Sub-C	GP220SCHTD	1.2	2200	2420	23	42	53.5	220	16	Not Applicable

Typical Ambient Temperature : Charge : 0°C to 70°C, Discharge : -20°C to 70°C, Storage : -20°C to 35°C

Economy Series

AAA	AAA	GP35AAAH	1.2	350	370	10.5	44	7	35	16	350
	AAA	GP55AAAH**	1.2	550	580	10.5	43.7	13.0	55	16	550
	AAA	GP60AAAH**	1.2	600	630	10.5	43.7	13.0	60	16	600
AA	AA	GP60AAH	1.2	600	630	14.4	48.2	13.5	60	16	600
	AA	GP60AAM	1.2	600	630	14.4	48.2	13.0	60	16	Not Applicable
	AA	GP70AAH	1.2	700	730	14.4	48.2	15	70	16	700
	AA	GP70AAM	1.2	700	730	14.4	48.2	15	70	16	Not Applicable
	AA	GP80AAH	1.2	800	830	14.4	48.2	16	80	16	800
	AA	GP80AAM	1.2	800	830	14.4	48.2	16	80	16	Not Applicable

Typical Ambient Temperature : Standard Charge : 0°C to 45°C, Fast Charge : 10°C to 45°C, Discharge : -20°C to 50°C, Storage : -20°C to 35°C

One hour rate with charge termination control. * After charging at 0.1C for 16 hours. ** With UL approval.

Cell Size	Model No.	Nominal Voltage (V)	Capacity (0.2C discharge)*(mAh)		Nominal Dimension (mm)		Weight (g)	Standard Charge		1 Hr Charge Current (mA)#	
			Minimum	Typical	Diameter	Height		Current (mA)	Time (hour)		
Standard Series											
AAAA	1/3 AAAA	GP10AAAAH	1.2	100	105	8.6	15.5	2.6	10	16	100
	1/2 AAAA	GP18AAAAH	1.2	180	185	8.6	20.5	4	18	16	180
	2/3 AAAA	GP20AAAAH	1.2	200	210	8.6	29.1	4.7	20	16	200
	AAAA	GP30AAAAH	1.2	300	320	8.4	40.6	6.5	30	16	300
	5/4 AAAA	GP50AAAAALH	1.2	500	520	8.4	52.1	9.5	50	16	500
	7/5 AAAA	GP50AAAAAH	1.2	500	520	8.4	65.5	10.5	50	16	500
AAA	1/4 AAA	GP11AAAM	1.2	110	115	10.2	10.7	2.8	11	16	110
	1/3 AAA	GP16AAAM**	1.2	160	168	10.2	14.7	3.75	16	16	160
	1/2 AAA	GP33AAAH	1.2	315	330	10.4	22.5	6	33	16	330
	2/3 AAA	GP30AAAM**	1.2	300	315	10.2	29.3	7.5	30	16	300
AA	4/5 AA	GP40AAAH	1.2	400	420	10.5	36.2	8.5	40	16	400
	AA	GP25AAH	1.2	250	270	14.5	16.7	7	25	16	250
AF	2/3 AA	GP30AAH	1.2	300	320	14.5	28.7	10	30	16	300
	4/5 AA	GP135AAH	1.2	1350	1400	14.5	42.5	22.8	135	16	1350
	AA	GP130AAAM**	1.2	1300	1340	14.4	48.2	25	130	16	1300
	1/3 AF	GP45AFH	1.2	450	500	17	16.3	10	45	16	450
AF	1/2 AF	GP60AFH	1.2	600	650	17	22	14	60	16	600
	2/3 AF	GP110AFH	1.2	1100	1133	17	28.5	21	110	16	1100
	4/5 AF	GP181AFH	1.2	1800	1860	17	43	32	180	16	1800
	AF	GP230AFH	1.2	2300	2350	17	50	36	230	16	2300
N	1/3 N	GP13NH	1.2	130	137	11.65	11.8	3.85	13	16	130
	1/2 N	GP23NH	1.2	230	241	11.65	16.9	6.2	23	16	230
18210	18210	GP80LAH	1.2	800	860	18.3	21.5	17	80	16	800
Sub-C	4/5 Sub-C	GP170SCH	1.2	1700	1870	23	34	46	170	16	1700
	Sub-C	GP140SCH	1.2	1400	1470	23	43	40	140	16	1400
	Sub-C	GP220SCH**	1.2	2200	2420	23	43	55	220	16	2200
	Sub-C	GP300SCHE	1.2	3000	3150	23	43	59	300	16	3000
D	D	GP450DH	1.2	4500	4725	33	60	130	450	16	Not Applicable

Typical Ambient Temperature : Standard Charge : 0°C to 40/45°C, Fast Charge : 10°C to 40/45°C, Discharge : -20°C to 50°C, Storage : -20°C to 35°C

9V Series

9V	9V	GP17R7H**	7.2	170	175	15.7(T) x 26.5(W) x 48.5(H)	28	17	16	170
	9V	GP17R8H**	8.4	170	175	15.7(T) x 26.5(W) x 48.5(H)	32	17	16	170
	9V	GP17R9H**	9.6	170	175	15.7(T) x 26.5(W) x 48.5(H)	36	17	16	170
	9V	GP20R7H	7.2	200	210	15.7(T) x 26.5(W) x 48.5(H)	36.5	20	16	200
	9V	GP20R8H	8.4	200	210	15.7(T) x 26.5(W) x 48.5(H)	42.5	20	16	200
	9V	GP30R7H	7.2	300	320	17.5(T) x 26.2(W) x 48.5(H)	48.5	30	16	300

Typical Ambient Temperature : Standard Charge : 0°C to 45°C, Fast Charge : 10°C to 45°C, Discharge : -20°C to 50°C, Storage : -20°C to 35°C

Prismatic Type



Prismatic	Prismatic	GP4M	1.2	400	440	6.1(T) x 17.0(W) x 31.3(H)	10	40	16	400
	Prismatic	GP5M60	1.2	550	600	6.1(T) x 17.0(W) x 35.3(H)	11	55	16	550
	Prismatic	GP5M70	1.2	640	700	6.1(T) x 17.0(W) x 36.0(H)	12	64	16	640
	Prismatic	GP6M	1.2	550	600	6.7(T) x 16.1(W) x 33.8(H)	11	55	16	550
	Prismatic	GP7MS	1.2	700	750	6.1(T) x 17.0(W) x 67.0(H)	17	70	16	700
	Prismatic	GP8M	1.2	800	850	6.1(T) x 17.0(W) x 48.0(H)	17	80	16	800
Prismatic	GP14M145**	1.2	1350	1450	6.1(T) x 17.0(W) x 67.0(H)	25	135	16	13	




NiMH Rechargeable Batteries

Performance Characteristics


Cylindrical Cells

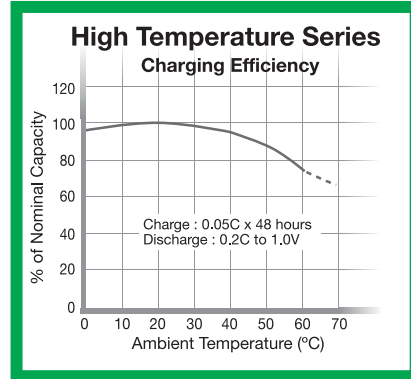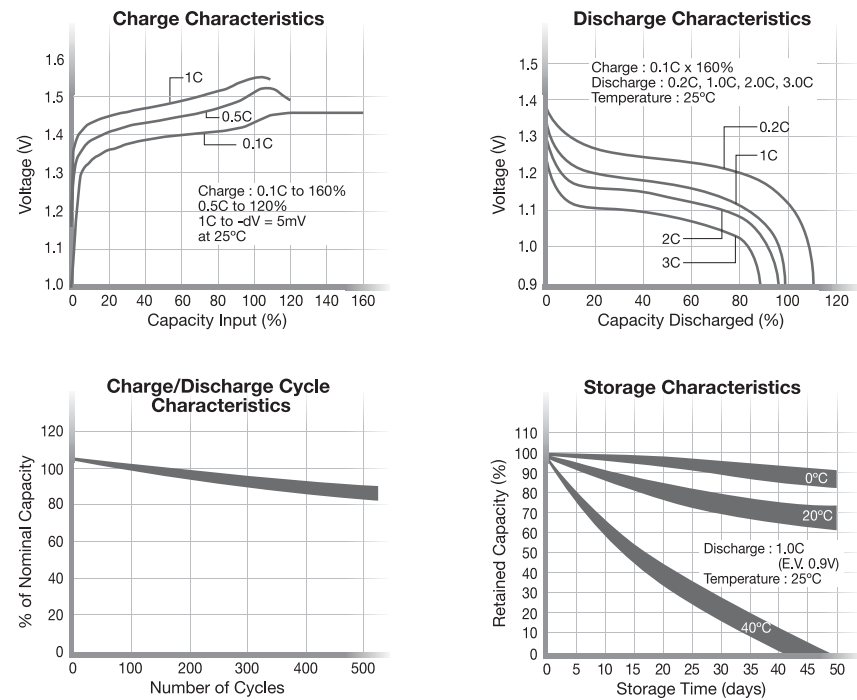

Prismatic Cells

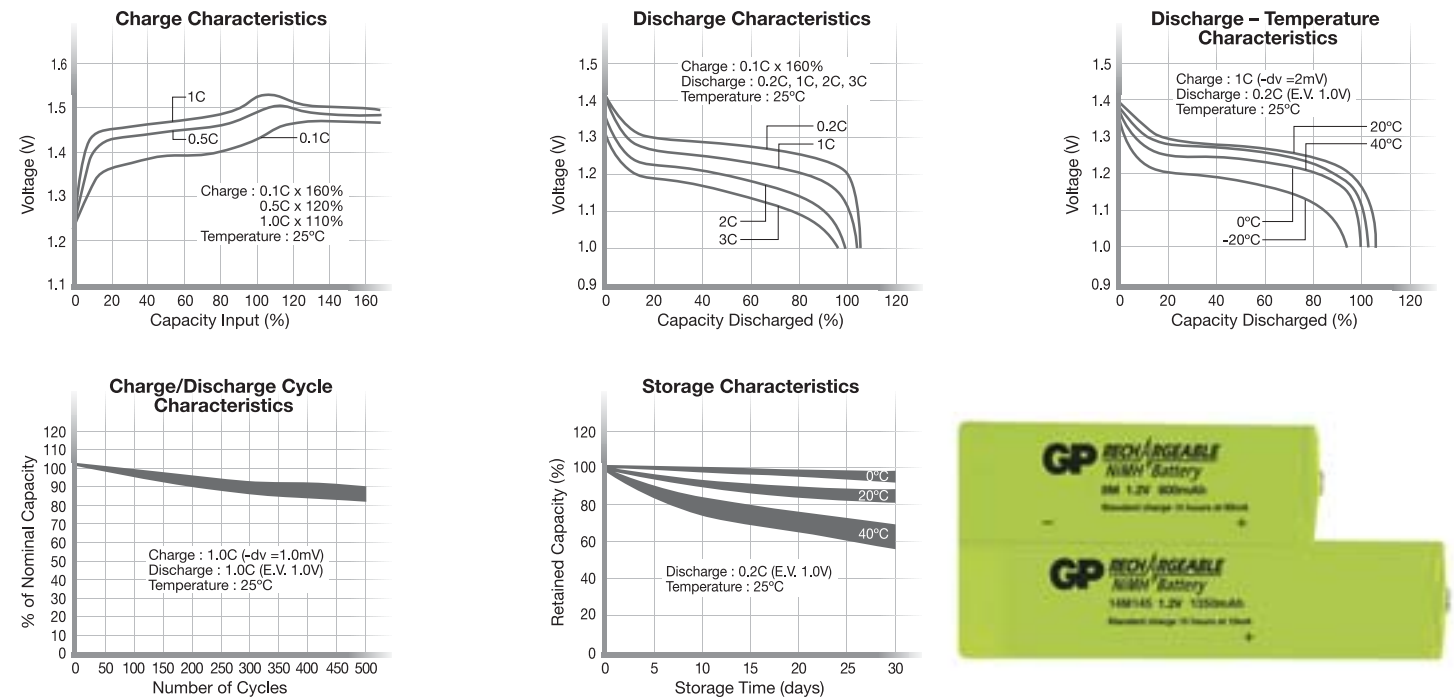

Button Cells

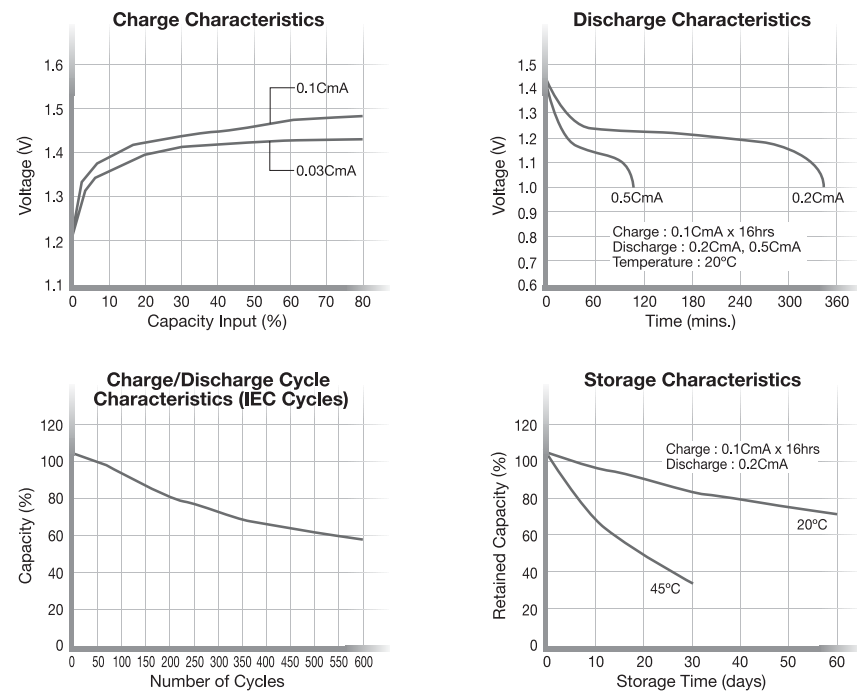

9V Batteries

